

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13
COM	1E	1D	1C	DP1	2E	2D	2C	DP2	3E	3D	3C	DP3	COM
PIN	14	15	16	17	18	19	20	21	22	23	24	25	26
COM	COM	3B	3A	3F	3G	2B	2A	2F	2G	1B	1A	1F	1G

1. ALL DIMENSIONS ARE IN mm WITH ± 0.20 TOLERANCE UNLESS OTHERWISE SPECIFIED.
2. VIEWING ANGLE: 6:00 O'CLOCK.
3. VIEWING MODE: POSITIVE, REFLECTIVE
4. DISPLAY TYPE : TN
5. CONNECTION: PIN
6. FLUID SPECIFICATION:
- DRIVING VOLTAGE: 3.0V
- MULTIPLEX LEVEL: STATIC
- OPERATING TEMP. : -20°C -- $+70^{\circ}\text{C}$
- STORAGE TEMP. : -20°C --- $+70^{\circ}\text{C}$



厦门精显电子有限公司
XIAMEN PRECISE DISPLAY CO., LTD.

客户确认:

绘图: 姚晓虹

绘图编号: GYTN0717

单位: mm

审核: 陈伟


客户编号:



日期: 2004.08.23

批准: 苏斌

图纸版本号: 01

页数: 1/3



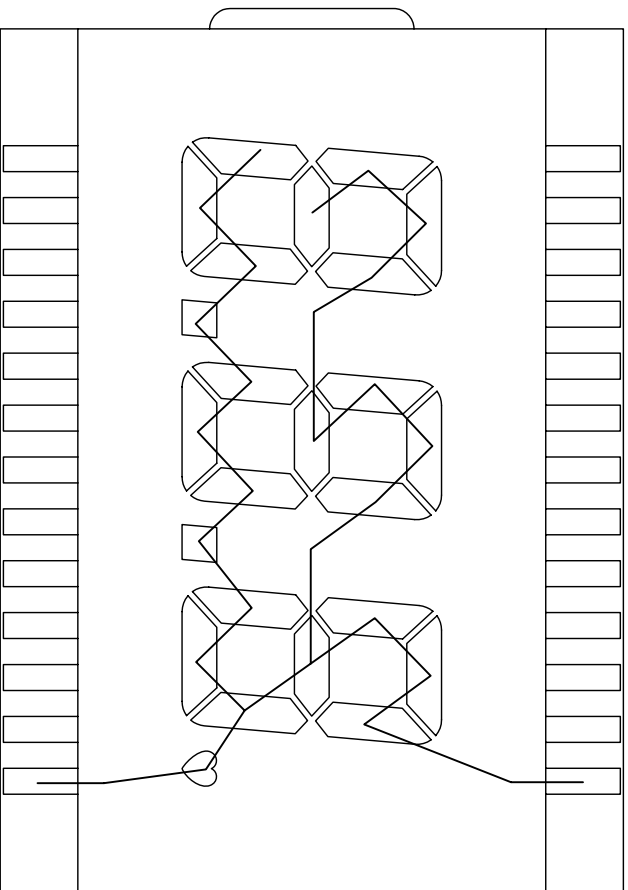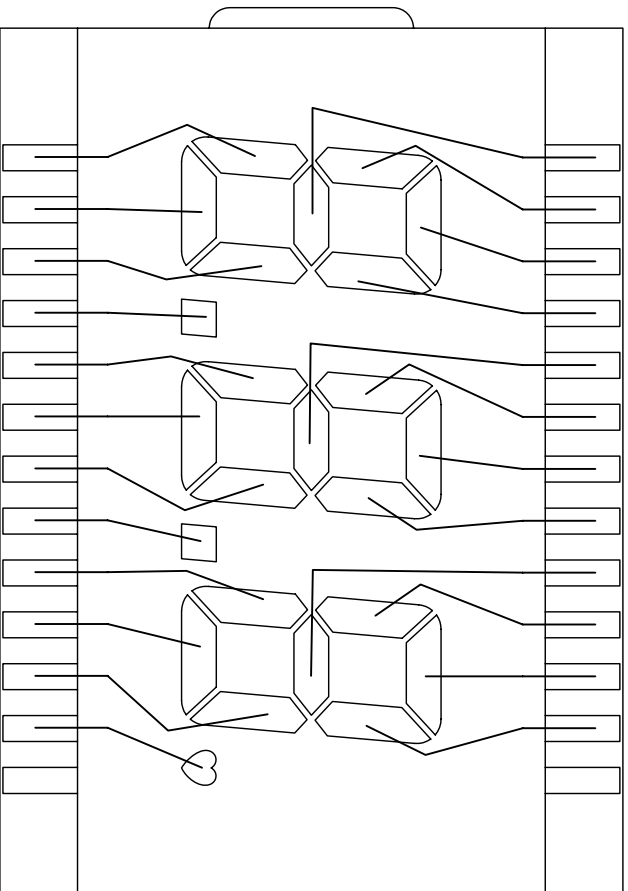


SEG

COM



厦门精显电子有限公司
XIAMEN PRECISE DISPLAY CO., LTD.



客户确认:

绘图: 姚晓虹

绘图编号: GYTN0717

mm

单位:

审核: 苏斌


客户编号:

日期: 2004.08.23


批准: 苏斌

图纸版号: 01





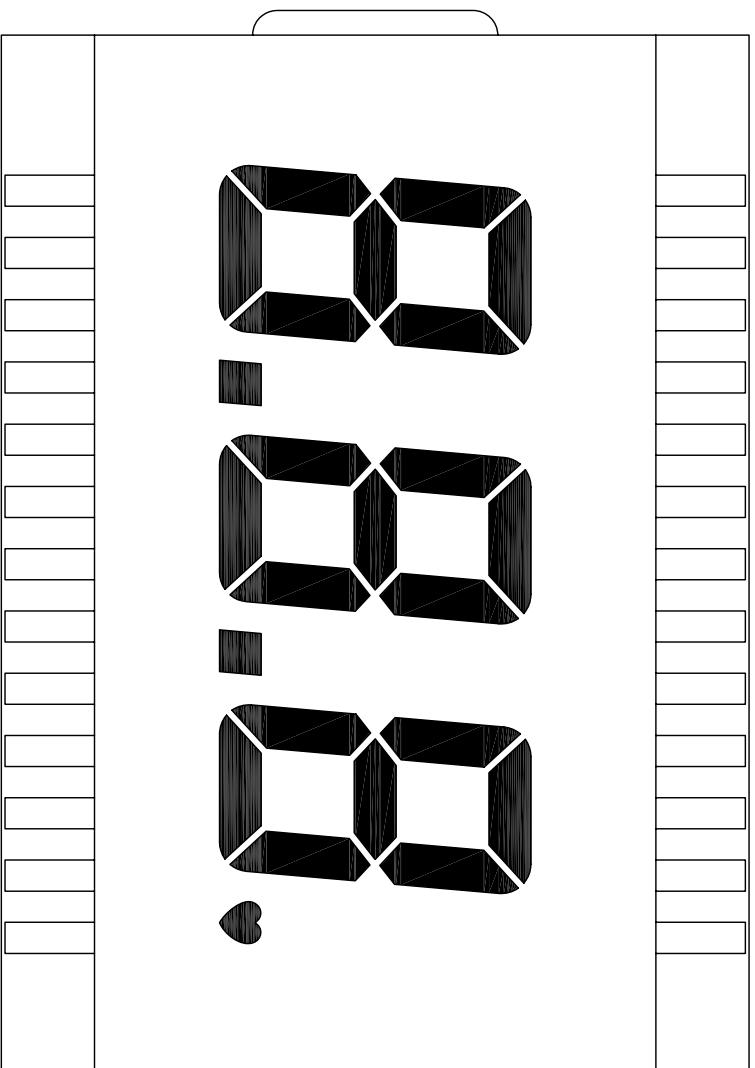页数: 2/3



FULL DISPLAY



(1:1)

 厦门精显电子有限公司 XIAMEN PRECISE DISPLAY CO., LTD.		客户确认:		
		绘图: 姚晓虹 审核: 	绘图编号: GYTN0717 客户编号:	
批准: 	图纸版号: 01	页数: 3/3		