

PIN	1	2	3	4	5	6	7	8	9	10	11	12
BP	1E	1D	1C	2E	2D	2C	3E	3D	3C	3B		
PIN	13	14	15	16	17	18	19	20	21	22	23	24
BP	3A	3F	3G	2B	2A	2F	2G	1B	1A	1F	1G	BP

1. ALL DIMENSIONS ARE IN mm WITH  $\pm 0.20$   
TOLERANCE UNLESS OTHERWISE SPECIFIED.

2. VIEWING ANGLE: 6:00 O'CLOCK.

3. VIEWING MODE: POSITIVE, PELECTIVE

4. DISPLAY TYPE : TN

5. CONNECTION: PIN



6. FLUID SPECIFICATION:

DRIVING VOLTAGE: 5.0V


MULTIPLEX LEVEL: STATIC

OPERATING TEMP. :  $-10^{\circ}\text{C}$  --  $+60^{\circ}\text{C}$

STORAGE TEMP. :  $-20^{\circ}\text{C}$  --  $+70^{\circ}\text{C}$

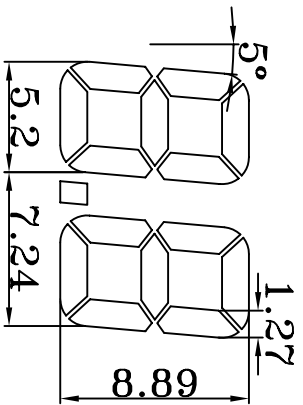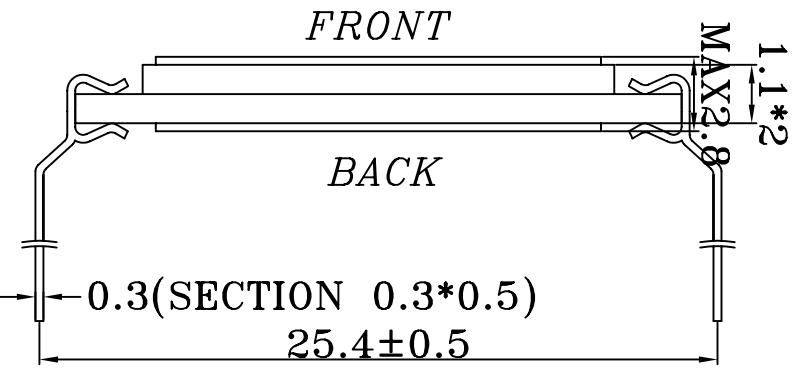

厦门精显电子有限公司  
XIAMEN PRECISE DISPLAY CO., LTD.



客户确认:

绘图: 姚晓虹

绘图编号: CYTN00804

单位: mm

审核:

客户编号:

日期: 2004.09.14

批准: 苏斌

图纸版号: 01

页数: 1/1