



1	2	3	4	5	6	7	8	9	10	11	12	13	14
COM	--	--	--	E1	D1	C1	DP1	E2	D2	C2	DP2	E3	D3
15	16	17	18	19	20	21	22	23	24	25	26	27	28
C3	DP3	E4	D4	C4	B4	A4	F4	G4	B3	A3	F3	G3	COL
29	30	31	32	33	34	35	36	37	38	39	40		
B2	A2	F2	G2	--	B1	A1	F1	G1	--	--	COM		

1. ALL DIMENSIONS ARE IN mm WITH ±0.2 TOLERANCE UNLESS OTHERWISE SPECIFIED.
 2. VIEWING ANGLE: 6:00 O'CLOCK.
 3. VIEWING MODE: POSITIVE TRANSMISSIVE
 4. DISPLAY TYPE : TN
 5. CONNECTION: PIN
 6. FLUID SPECIFICATION:
- DRIVING VOLTAGE: 5.0V
MULTIPLEX LEVEL: STATIC
OPERATING TEMP. : -35°C --- +80°C
STORAGE TEMP. : -40°C --- +85°C

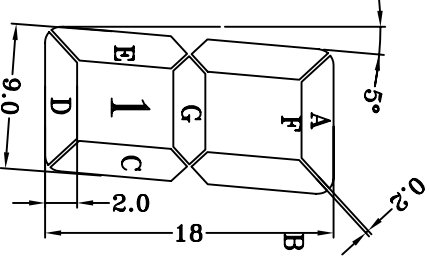

厦门精显电子有限公司
XIAMEN PRECISE DISPLAY CO., LTD.



客户确认:

绘图: 姚晓虹
审核:
绘图编号: GYTN1000


单位: mm

客户编号:


日期: 2004.11.13

批准: 苏斌
图纸版号: 01


页数: 1/3

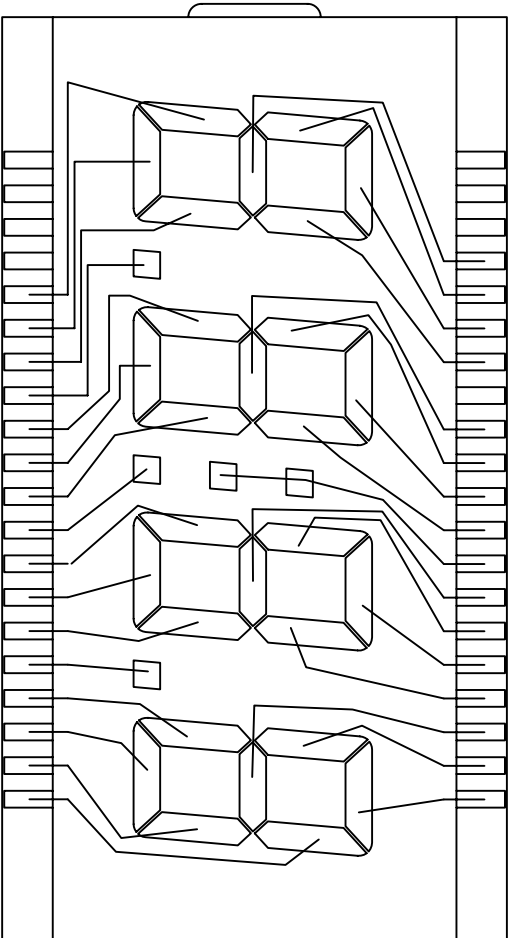


SEG

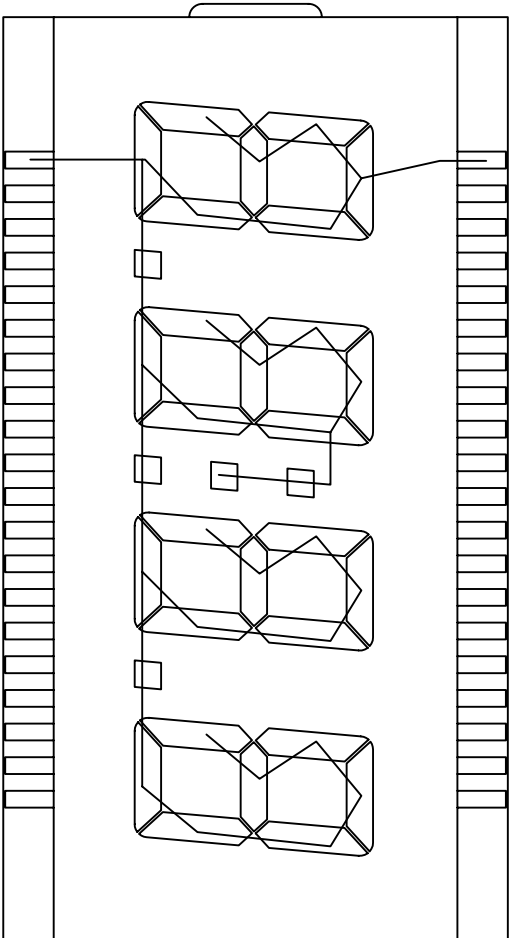

COM



厦门精显电子有限公司
XIAMEN PRECISE DISPLAY CO., LTD.



客户确认:

绘图: 姚晓虹

绘图编号: GYTN1000

单位: mm

审核:

客户编号:



日期: 2004.11.13

批准:

方斌

图纸版号: 01

页数: 2/3

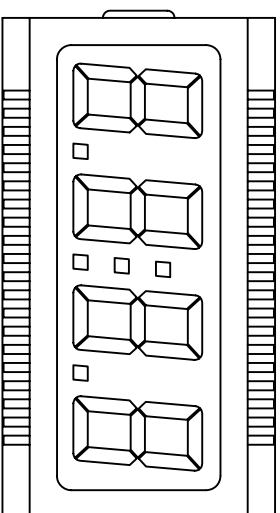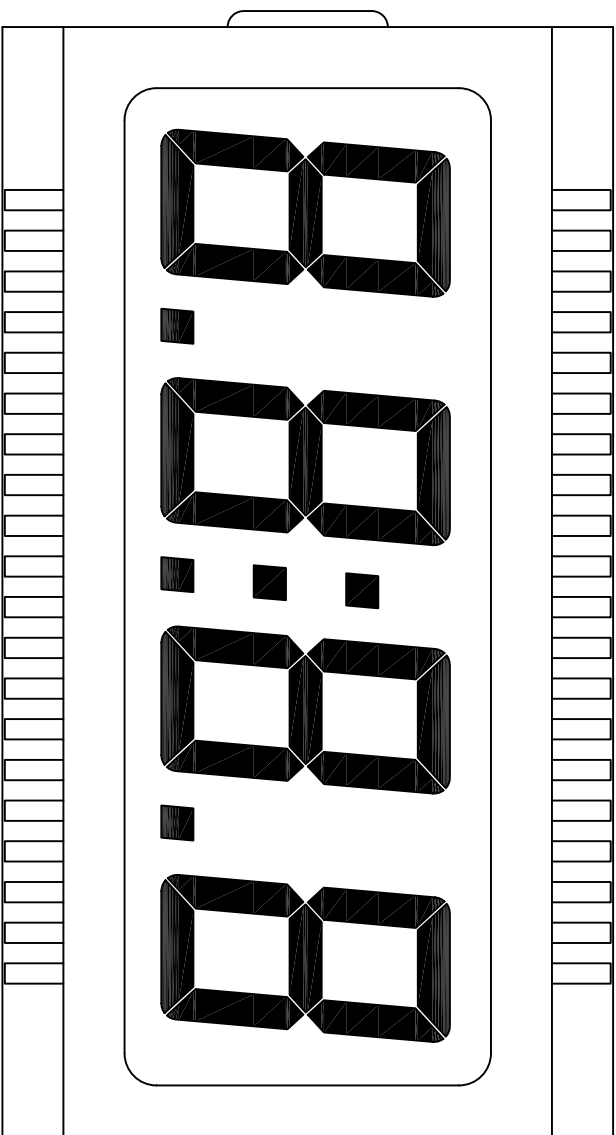

SCALE: 1:1



厦门精显电子有限公司
XIAMEN PRECISE DISPLAY CO., LTD.



客户确认:

绘图: 姚晓虹

绘图编号: GYTN1000

单位: mm

审核:

客户编号:

日期: 2004.11.13

批准: 苏斌

图纸版号: 01

页数: 3/3