

1. ALL DIMENSIONS ARE IN mm WITH ± 0.20 TOLERANCE UNLESS OTHERWISE SPECIFIED.

2. VIEWING ANGLE: 6:00 O'CLOCK

3. VIEWING MODE: POSITIVE, REFLECTIVE

4. DISPLAY TYPE : TN

5. CONNECTOR: PIN

6. FLUID SPECIFICATION:

DRIVING VOLTAGE: 3.0V

MULTIPLEX LEVEL: STATIC


OPERATING TEMP. : -30°C -- +80°C

STORAGE TEMP. : -30°C -- +80°C


PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
COM	COMP1	1E	1D	1C	P2	2E	2D	2C	2B	2A	2F	2G	1B	1A	1F	1G	COM	




厦门精显电子有限公司
XIAMEN PRECISE DISPLAY CO., LTD.



客户确认:		绘图: 吴源		绘图编号: GYTN1403		单位: mm	
审核: 苏斌		审核: 苏斌		客户编号:		日期: 2005.02.25	
批准: 苏斌		批准: 苏斌		图纸版号: 01		页数: 1/3	

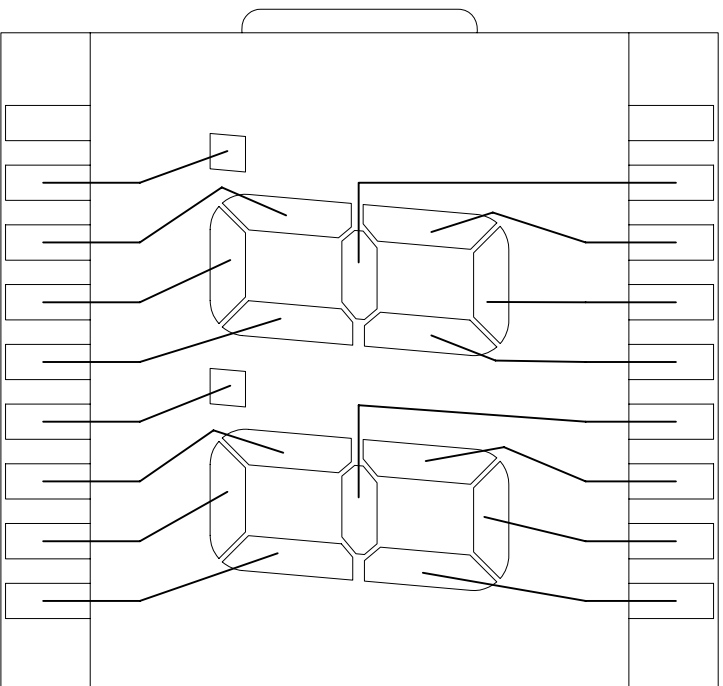

SEGMENT

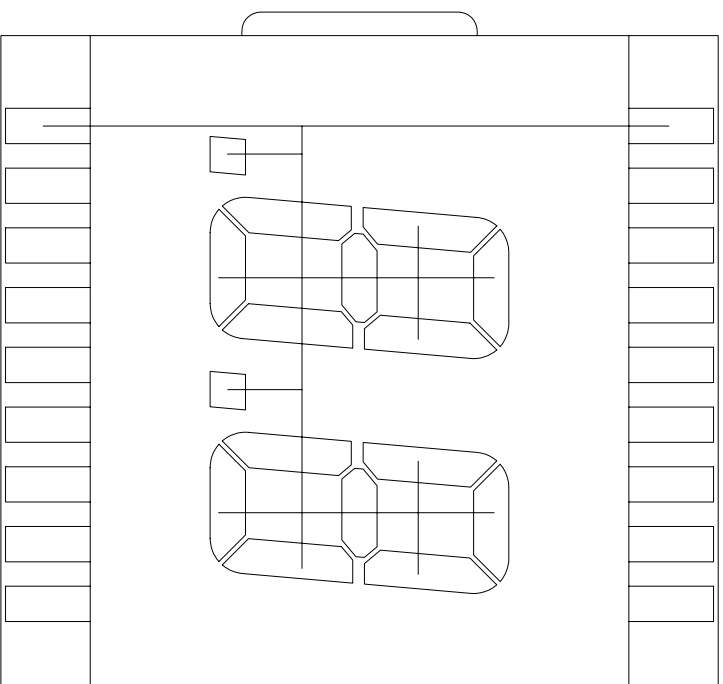

COMMON



厦门精显电子有限公司
XIAMEN PRECISE DISPLAY CO., LTD.



客户确认:

绘图: 吴源

绘图编号: GYTN1403

单位: mm

审核: 苏斌



客户编号:

日期: 2005.02.25

批准: 苏斌

图纸版号: 01

页数: 2/3

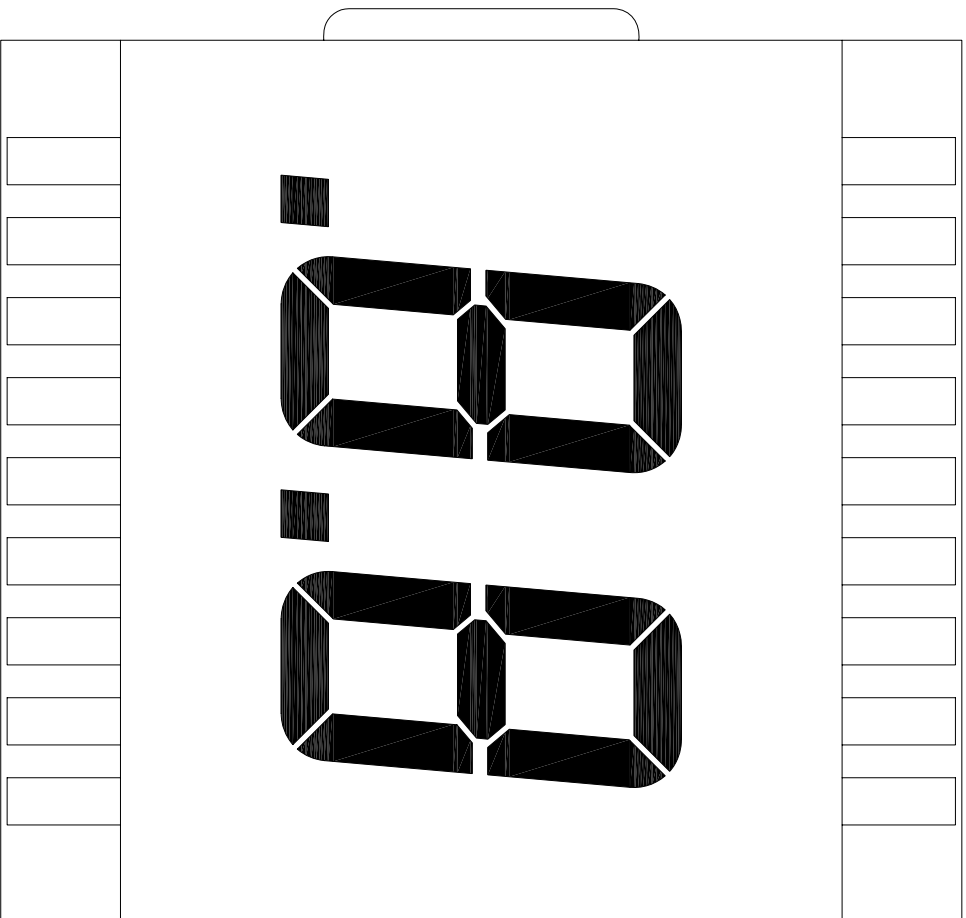


SCALE: 1:1

显示效果图



厦门精显电子有限公司
XIAMEN PRECISE DISPLAY CO., LTD.



客户确认:

绘图: 吴源

绘图编号: GYTN1403

单位: mm

审核: 苏斌

客户编号:

日期: 2005.02.25

批准: 苏斌

图纸版号: 01

页数: 3/3