


1. ALL DIMENSIONS ARE IN mm WITH ± 0.20 TOLERANCE UNLESS OTHERWISE SPECIFIED.
2. VIEWING ANGLE: 6:00 O'CLOCK.
3. VIEWING MODE: POSITIVE, REFLECTIVE
4. DISPLAY TYPE : TN
5. CONNECTION:
6. FLUID SPECIFICATION:
- DRIVING VOLTAGE: 4.5V
- MULTIPLEX LEVEL: 1/4DUTY, 1/3BIAS
- OPERATING TEMP. : -20°C --- $+70^\circ\text{C}$
- STORAGE TEMP. : -25°C --- $+75^\circ\text{C}$



厦门精显电子有限公司
 XIAMEN PRECISE DISPLAY CO., LTD.



客户确认:

绘图: 郑秋波

审核: LTT

单位: mm

批准: 郑秋波

绘图编号: GYTN1488


日期: 2005.03.30

审核: LTT


客户编号:

页数: 1/3

图纸版号: 02

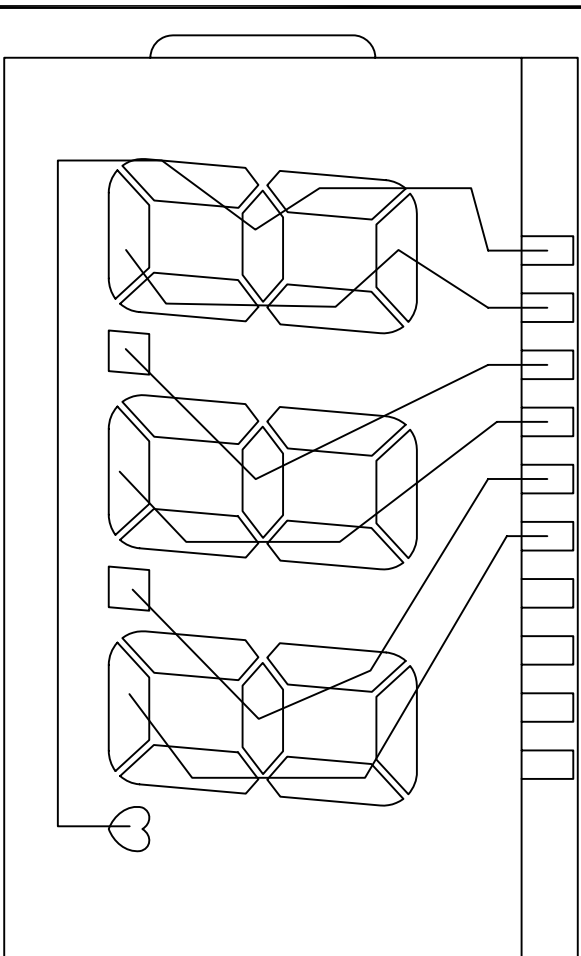


SEGMENT

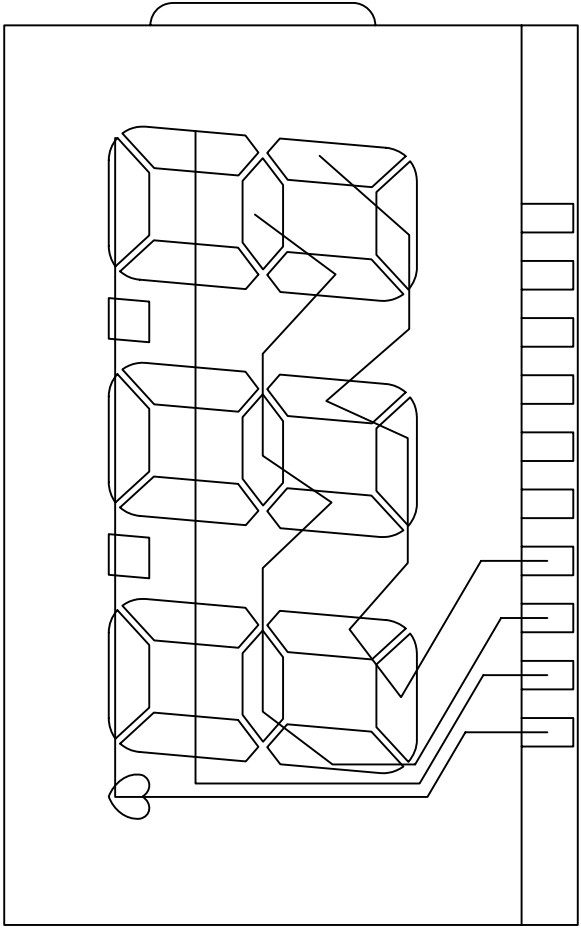


COMMON

PIN	1	2	3	4	5	6	7	8	9	10
COM1	1F	1A	2F	2A	3F	3A	COM1	--	--	--
COM2	1G	1B	2G	2B	3G	3B	--	COM2	--	--
COM3	1E	1C	2E	2C	3E	3C	--	--	COM3	--
COM4	P3	1D	P1	2D	P2	3D	--	--	--	COM4

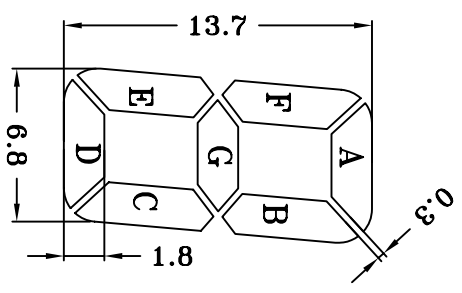

 厦门精显电子有限公司
XIAMEN PRECISE DISPLAY CO., LTD.



客户确认:

绘图: 郑秋波
审核: LTT

单位: mm

客户编号:



日期: 2005.03.30

批准: 苏斌

页数: 2/3

绘图编号: GYTN1488


图纸版号: 02

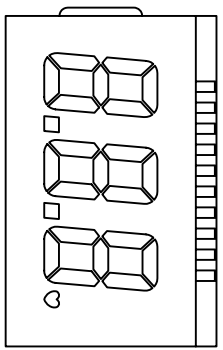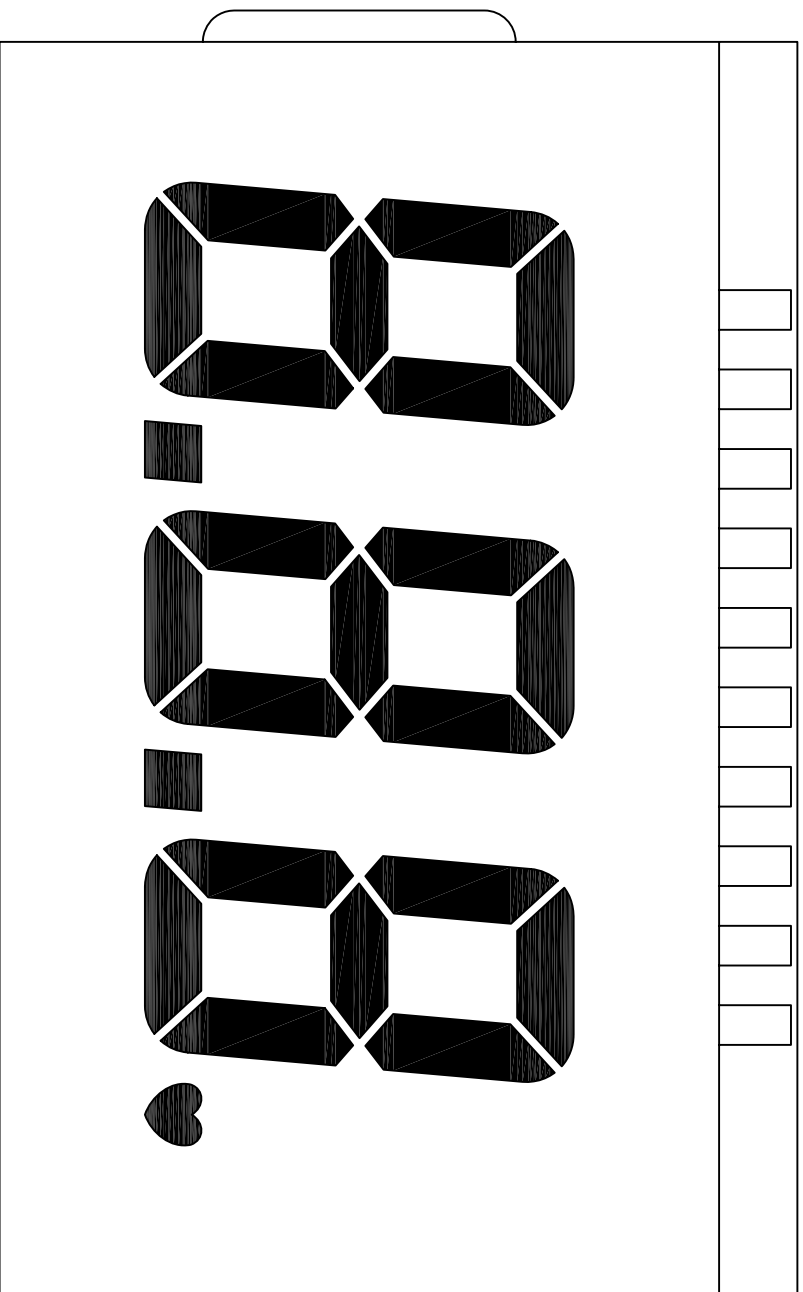

1:1



厦门精显电子有限公司
XIAMEN PRECISE DISPLAY CO., LTD.



客户确认:

绘图: 郑秋波
审核: LTT
批准: *郑秋波*

单位: mm

绘图编号: GYTN1488
客户编号:

日期: 2005.03.30

图纸版号: 02

页数: 3/3